
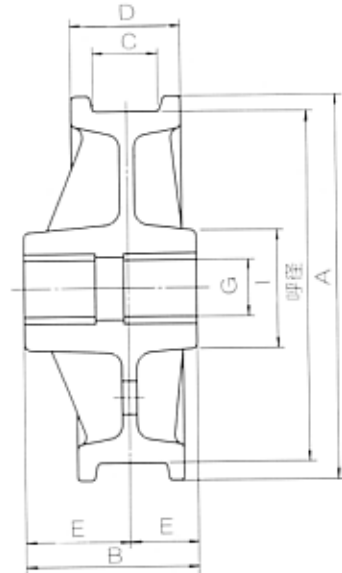


NSブッシュ入車輪

車輪材質 SCMn2

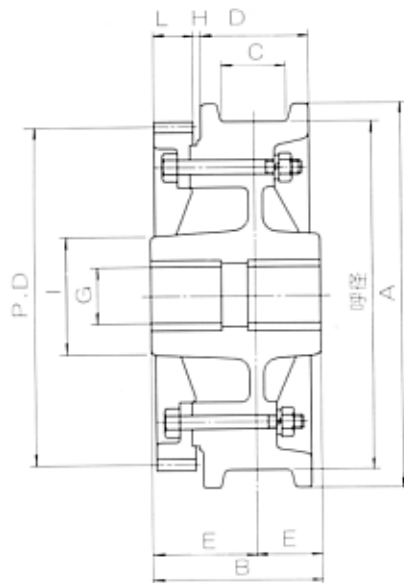

駆動車A (車輪踏面巾C-60)

従動車A (車輪踏面巾C-60)

呼径	記号	A	B	C	D	E	F	G	H	I	L	M	NT	P.D
200A		230	150	60	90	50	100	40	10	80	40	4	50	200
250A		280	150	60	90	50	100	50	10	100	40	4	63	252
300A		330	150	60	90	50	100	50	10	100	40	5	60	300
350A		380	170	60	95	55	115	60	10	120	40	5	70	350
400A		440	180	60	100	60	120	70	10	125	50	6	67	402
450A		490	180	60	100	60	120	80	10	140	50	6	74	444

呼径	記号	A	B	C	D	E	F	G	I
200A		230	150	60	90	50	100	40	80
250A		280	150	60	90	50	100	50	100
300A		330	150	60	90	50	100	50	100
350A		380	170	60	95	55	115	60	120
400A		440	180	60	100	60	120	70	125
450A		490	180	60	100	60	120	80	140

駆動車B (車輪踏面巾C-80)

従動車B (車輪踏面巾C-80)

呼径	記号	A	B	C	D	E	F	G	H	I	L	M	NT	P.D
250B		280	180	80	120	65	115	50	10	90	40	4	63	252
300B		330	180	80	120	65	115	60	10	120	40	5	60	300
350B		380	190	80	120	65	125	70	10	130	50	6	58	348
400B		440	200	80	125	70	130	80	10	150	50	6	67	402
450B		490	220	80	125	70	150	85	16	160	63	8	56	448
500B		540	230	80	125	75	155	90	16	170	63	8	63	504
560B		600	240	80	125	80	160	100	16	185	63	8	70	560
600B		640	240	80	125	80	160	100	16	185	63	10	60	600
630B		670	240	80	125	80	160	100	16	185	63	10	63	630
710B		750	260	80	125	100	160	110	16	200	63	10	71	710
800B		840	260	80	125	100	160	120	16	210	63	10	79	790

呼径	記号	A	B	C	D	E	F	G	I
250B		280	180	80	120	65	115	50	90
300B		330	180	80	120	65	115	60	120
350B		380	190	80	120	65	125	70	130
400B		440	200	80	125	70	130	80	150
450B		490	220	80	125	70	150	85	160
500B		540	230	80	125	75	155	90	170
560B		600	240	80	125	80	160	100	185
600B		640	240	80	125	80	160	100	185
630B		670	240	80	125	80	160	100	185
710B		750	260	80	125	100	160	110	200
800B		840	260	80	125	100	160	120	210

車輪踏面硬度 HS 26以上
焼入車輪踏面硬度 HS 50±5