
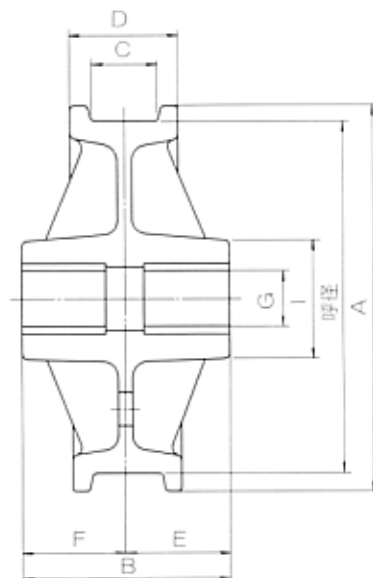


JIS型ブッシュ入車輪

車輪材質 SCMn2

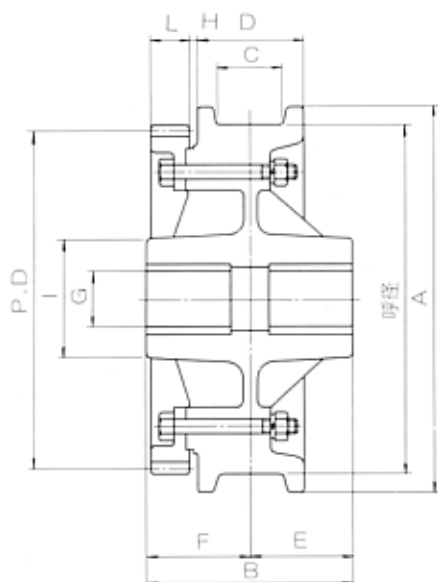

駆動車A (車輪踏面巾C-63)

従動車A (車輪踏面巾C-63)

呼径 \ 記号	A	B	C	D	E	G	H	I	L	M	NT	P.D
200A	232	224	63	100	112	50	16	110	40	5	40	200
250A	282	224	63	100	112	50	16	110	40	6	42	252
315A	347	224	63	100	112	60	16	120	40	6	53	318
355A	387	250	63	100	125	70	16	125	50	6	59	354
400A	432	250	63	100	125	70	16	125	50	6	66	396
450A	482	250	63	100	125	80	16	140	50	6	74	444

呼径 \ 記号	A	B	C	D	E	G	I
200A	232	224	63	100	112	50	100
250A	282	224	63	100	112	50	100
315A	347	224	63	100	112	60	120
355A	387	250	63	100	125	70	125
400A	432	250	63	100	125	70	125
450A	482	250	63	100	125	80	140

駆動車B (車輪踏面巾C-80)

従動車B (車輪踏面巾C-80)

呼径 \ 記号	A	B	C	D	E	G	H	I	L	M	NT	P.D
250B	290	280	80	125	140	60	16	120	50	6	42	252
315B	355	280	80	125	140	70	16	125	50	8	40	320
355B	395	280	80	125	140	80	16	140	50	8	44	352
400B	440	280	80	125	140	80	16	140	50	8	50	400
450B	490	315	80	125	157.5	90	16	170	63	8	56	448
500B	540	315	80	125	157.5	90	16	170	63	8	63	504
560B	600	315	80	125	157.5	100	16	185	63	8	70	560
630B	670	315	80	125	157.5	100	16	185	63	10	63	630
710B	750	315	80	125	157.5	110	16	200	63	10	71	710
800B	840	315	80	125	157.5	120	16	210	63	10	79	790
900B	940	315	80	125	157.5	130	16	225	63	10	89	890

呼径 \ 記号	A	B	C	D	E	G	I
250B	290	280	80	125	140	60	120
315B	355	280	80	125	140	70	125
355B	395	280	80	125	140	80	140
400B	440	280	80	125	140	80	140
450B	490	315	80	125	157.5	90	170
500B	540	315	80	125	157.5	90	170
560B	600	315	80	125	157.5	100	185
630B	670	315	80	125	157.5	100	185
710B	750	315	80	125	157.5	110	200
800B	840	315	80	125	157.5	120	210
900B	940	315	80	125	157.5	130	225

車輪踏面硬度 HS 26以上
焼入車輪踏面硬度 HS 50±5